



escelco

Excellence beyond Solar Energy

MONOCRYSTALLINE MODULE 300W ULTRA-BLACK








300W | 60 cells | Black Cell Interconnections/Black Busbar/Black Frame

25 YEARS PERFORMANCE WARRANTY

15 YEARS PRODUCT WARRANTY

Escelco operates from its photovoltaic cells and modules factory in Bembibre, León. Through the vertical integration of the production process and the quality control of all its products, Escelco provides security, guarantees and service throughout Spain.



-  maximum voltage up to 1.500V
-  6 optional by-pass diodes
-  Electroluminescence test
-  High transmissivity and anti-reflective glass
-  EN 61215-2:2017 / EN IEC 61730-2:2018/AC:2018-06
-  Frame with higher mechanical resistance and air chamber
-  Back load (wind) 2.400 Pa / Frontal load (snow) 5.400 Pa



ALIDAD EUROPEA

ESPAÑA
GARANTÍA · SERVICIO



Factory:

Polígono Industrial Bierzo Alto. (A6 - km 372)
C/ Las Canteras s/n, 24318 Bembibre, Leon. Spain
+34 987 526 880

info@escelco.eu / www.escelco.eu

TECHNICAL FEATURES

Frame

Black anodized aluminium 0,015 mm

Robust and resistant to corrosion

Built-in plug

Connection box

Sealed, robust and wide for heat dissipation

IP67/IP68 according to IEC 60529

Diodes by-pass built-in (3/6)
for protection of the partial shading

Connector mC4 or compatible

Cables 1m ($\pm 0,1m$) length and 4mm² section

Fire Class I approval (unl 9177)

Frontal

3,2 mm ArC tempered glass

Textured, extra-clear with low iron content

Solar cells

60 cells polycrystalline silice / 156x156mm



Peso, dimensiones y packaging

20 Kg | 1640 x 992 x 40mm(+/-1%) | Packaging: 784 pcs-truck

19 Kg | 1650 x 992 x 35mm(+/-1%) | Packaging: 896 pcs-truck

MONOCRISTALINE MODULE 300W

60 cells | Ultra Black

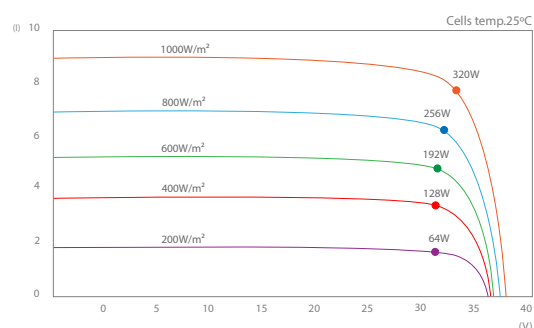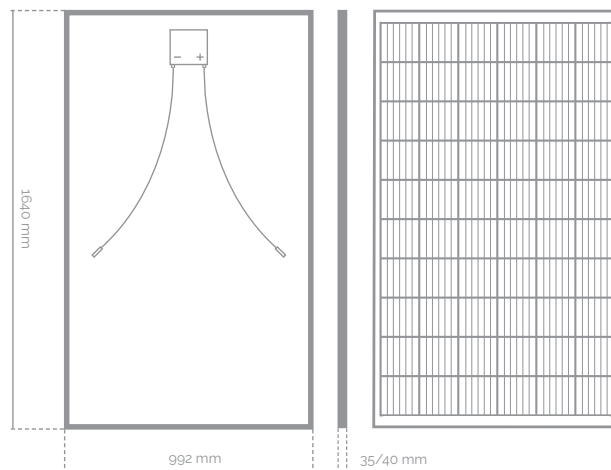

ELECTRIC DATA

Standard - Black	MESC300_60UB
Nominal power, P _{mpp}	300 W
Tolerance, P _{mpp}	0 / +5W
Area of the module	1,62
Module efficiency	18,52%
I _{sc}	9,89 A
U _{oc}	39,75 V
I _{mpp}	9,37 A
U _{mpp}	32,02 V
Maximum voltage	1000 V / 1500 V
α I _{sc}	0,05% / °C
β U _{oc}	- 0,29% / °C
γ P _{max}	- 0,39% / °C
Temperature range	- 40°C to +85°C
NOCT	45°C \pm 2°C

Note: read the instruction manual of this product and follow the indications STC. Values are valid for: 1000W/m², Am 1,5 and cell's temperature of 25oC. measurement tolerance +/-3% (AAA Solar simulation -IEC 60.904-9-). All the information of this brochure may be amended without notice by Escelco.



Factory:
Poligono Industrial Bierzo Alto. (A6 - km 372)
C/ Las Canteras s/n, 24318 Bembibre, Leon. Spain
+34 987 526 880
info@escelco.eu / www.escelco.eu